




DELTA SDC

Irrigation impeller water meter, dry dial


PERFORMANCE ACCORDING TO MID 2004/22/CE DIRECTIVE

SIZE		PERMANENT FLOW Q_3 (m ³ /h)	MAXIMUM FLOW Q_4 (m ³ /h)	TRANSITIONAL FLOW Q_2 (l/h)	MINIMUM FLOW Q_1 (l/h)	WORKING PRESSURE (bar)	MINIMUM READING (l)	MAXIMUM READING (m ³)	TEMPERATURE CLASS
(mm)	(inch)								
50	2"	63	78,75	5040	3150	16	1	999.999	T30/T50
65	2 1/2"	63	78,75	5040	3150	16	1	999.999	T30/T50
80	3"	100	125,00	8000	5000	16	1	999.999	T30/T50
100	4"	160	200,00	12800	8000	16	1	999.999	T30/T50
125	5"	250	312,50	20000	12500	16	1	999.999	T30/T50
150	6"	400	500,00	32000	20000	16	10	9.999.999	T30/T50
200	8"	630	787,50	50400	31500	16	10	9.999.999	T30/T50
250	10"	1000	1250,00	80000	50000	16	10	9.999.999	T30/T50
300	12"	1600	2000,00	128000	80000	16	10	9.999.999	T30/T50


Metrological class MID (Q_3/Q_1) R=20

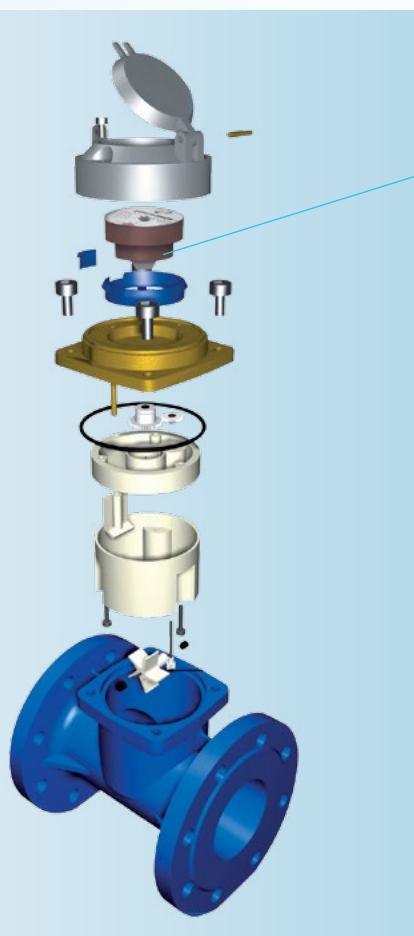

TYPICAL ERROR CURVE

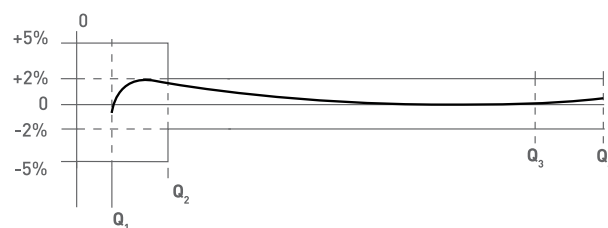


PRESSURE LOSS DIAGRAM

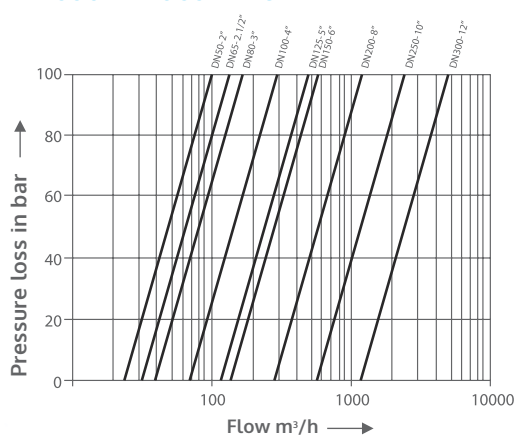

DIMENSIONS

(mm) SIZE (inch)	50	65	80	100	125	150	200	250	300
L (mm)	205	205	225	255	255	300	350	455	495
H (mm)	260	270	290	300	310	340	395	445	505



Version with metal lid and head available on request

For additional information and options, do not hesitate to contact us